


E95x


Adjustable spigot guide

Post top adapter - For 60-76mm diameter tube

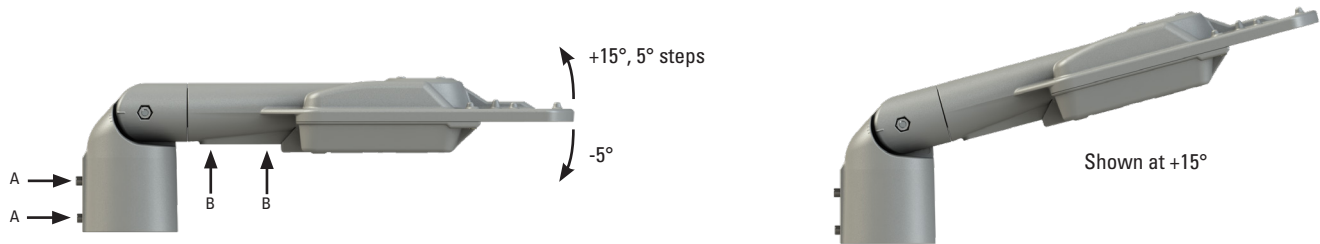


AA = Tighten 2 grub screws to 12Nm \pm 1Nm
BB = Tighten 2 grub screws to 8Nm \pm 1Nm

Side entry adapter - For 34-42mm diameter tube

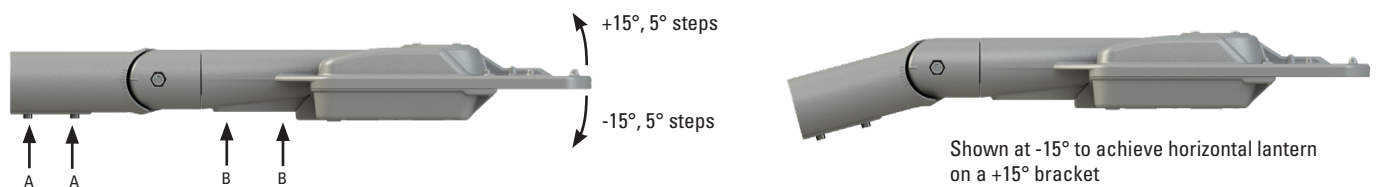

AA = Tighten 2 grub screws to 12Nm \pm 1Nm
BB = Tighten 2 grub screws to 8Nm \pm 1Nm


Side entry adapter - For 48-60mm diameter tube

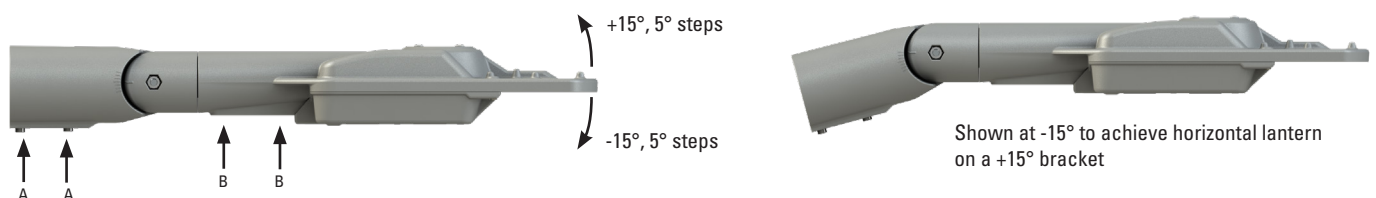

AA = Tighten 2 grub screws to 12Nm \pm 1Nm
BB = Tighten 2 grub screws to 8Nm \pm 1Nm



To adjust tilt angle loosen centre screw and align marks as required, tighten screw back to 12Nm \pm 1Nm



Charles House, Great Amwell
Ware, Hertfordshire. SG12 9TA, UK

T: 01920 860600
E: tech@cuphosco.co.uk
www.cuphosco.co.uk



FM 01397
ISO 9001
EMS 574081
ISO 14001